

Coaxial Between Series Adapter: 3.5/SMP-KJL

Description

Adaptor 3.5mm jack (female) / SMP (limited detent) jack(male)

Interface standards

MIL-STD-348

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	26.5GHz
VSWR	1.22max
Insert loss	≤0.04X √ f(GHz)
RF Leakage	≤-75dB
Voltage rating	350 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	≤6 m Ω
Out conductor	≤2 m Ω
Insulation resistance	≥5000M Ω

Mechanical Data

Weight	4.6 g
Durability	2000min Cycles

Environmental Data

Operating Temperature	-55 °C to +135 °C
-----------------------	-------------------

Material Data

Piece Parts

Center contact	Beryllium coper
Outer contact	Stainless steel
Insulator	PEI (Ultem)

Material


Surface Plating(μ m)

Gold 1.27 over nickle 2.0
Passivated



Coaxial Between Series Adapter: 3.5/SMP-KJL

Outline drawing

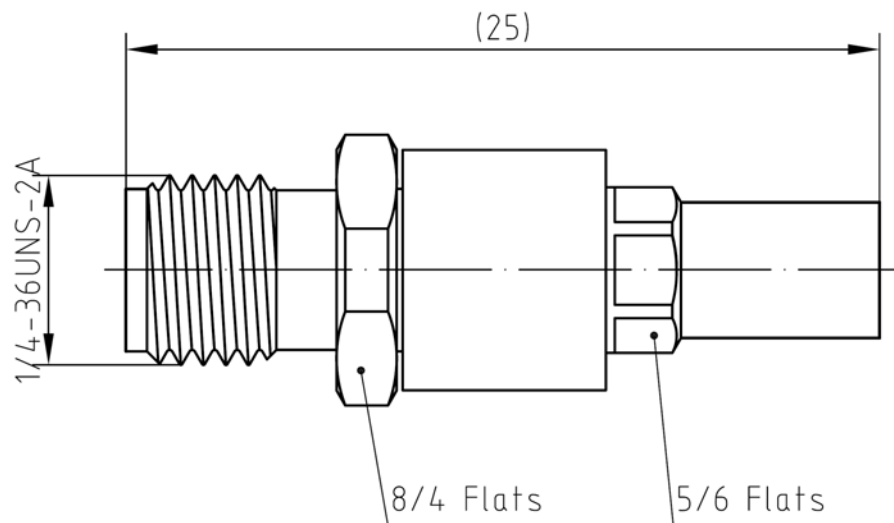

Packaging

Standard

100/Box=10Bag

Other

Contact us