

Coaxial Cable Connector: MMCX-KYD

Description

MMCX Straight bulkhead jack

Interface standards

MIL-C-39012

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	6 GHz
VSWR	$1.05 + 0.05 \times f(\text{GHz})$ max
Voltage rating	335 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	$\leq 5 \text{ m}\Omega$
Out conductor	$\leq 2.5 \text{ m}\Omega$
Insulation resistance	$\geq 1000 \text{ M}\Omega$

Mechanical Data

Weight	0.9 g
Durability	500 Cycles

Environmental Data

Operating Temperature	-65 °C to 165 °C
-----------------------	------------------

Material Data


Piece Parts

Center contact	Beryllium copper
Body	Brass
Insulator	PTFE

Material


Surface Plating(μ m)

Gold 0.5 over Nickel 2.0
Gold 0.2 over Nickel 2.0



Coaxial Cable Connector: MMCX-KYD

Outline drawing

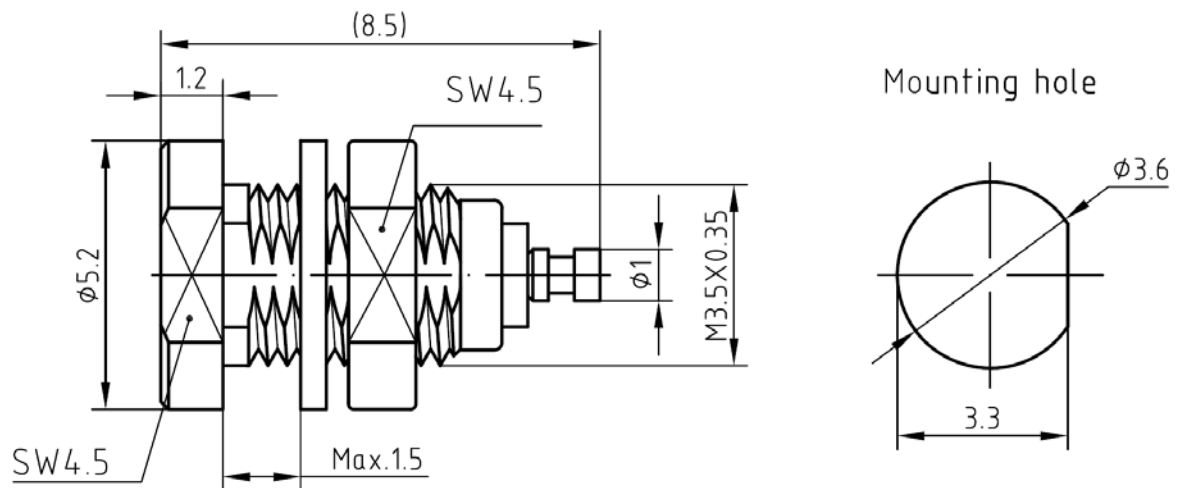

Packaging

Standard

150/Box=15 Bag

Other

Contact us