

Coaxial Between Series Adapter: 2.4/SMP-KJL

Description

Adaptor 2.4mm jack (female) / SMP (limited detent) jack (male)

Interface standards

MIL-STD-348

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	40 GHz
VSWR	1.25 max
Insert loss	$\leq 0.04X \sqrt{f(\text{GHz})}$
RF Leakage	$\leq -75\text{dB}$
Voltage rating	350 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	$\leq 6 \text{ m}\Omega$
Out conductor	$\leq 2 \text{ m}\Omega$
Insulation resistance	$\geq 5000\text{M}\Omega$

Mechanical Data

Weight	5.5 g
Durability	2000min Cycles

Environmental Data

Operating Temperature	-55 °C to +135 °C
-----------------------	-------------------

Material Data

Piece Parts

Center contact	Beryllium copper
Outer contact	Stainless steel
Insulator	PEI (Ultem)

Material


Surface Plating(μm)

Gold 1.27 over nickle 2.0
Passivated



Coaxial Between Series Adapter: 2.4/SMP-KJL

Outline drawing

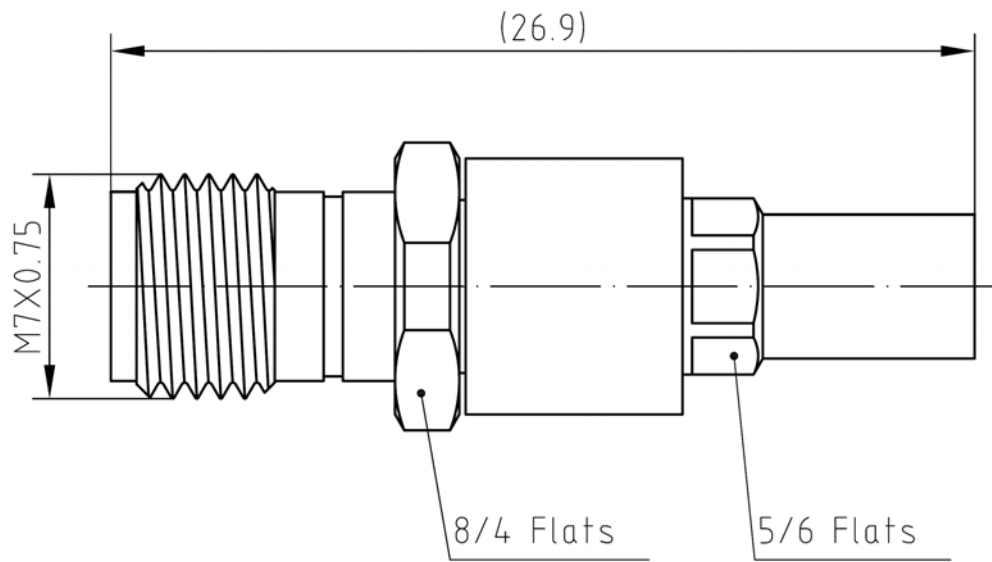

Packaging

Standard

100/Box=10Bag

Other

Contact us