


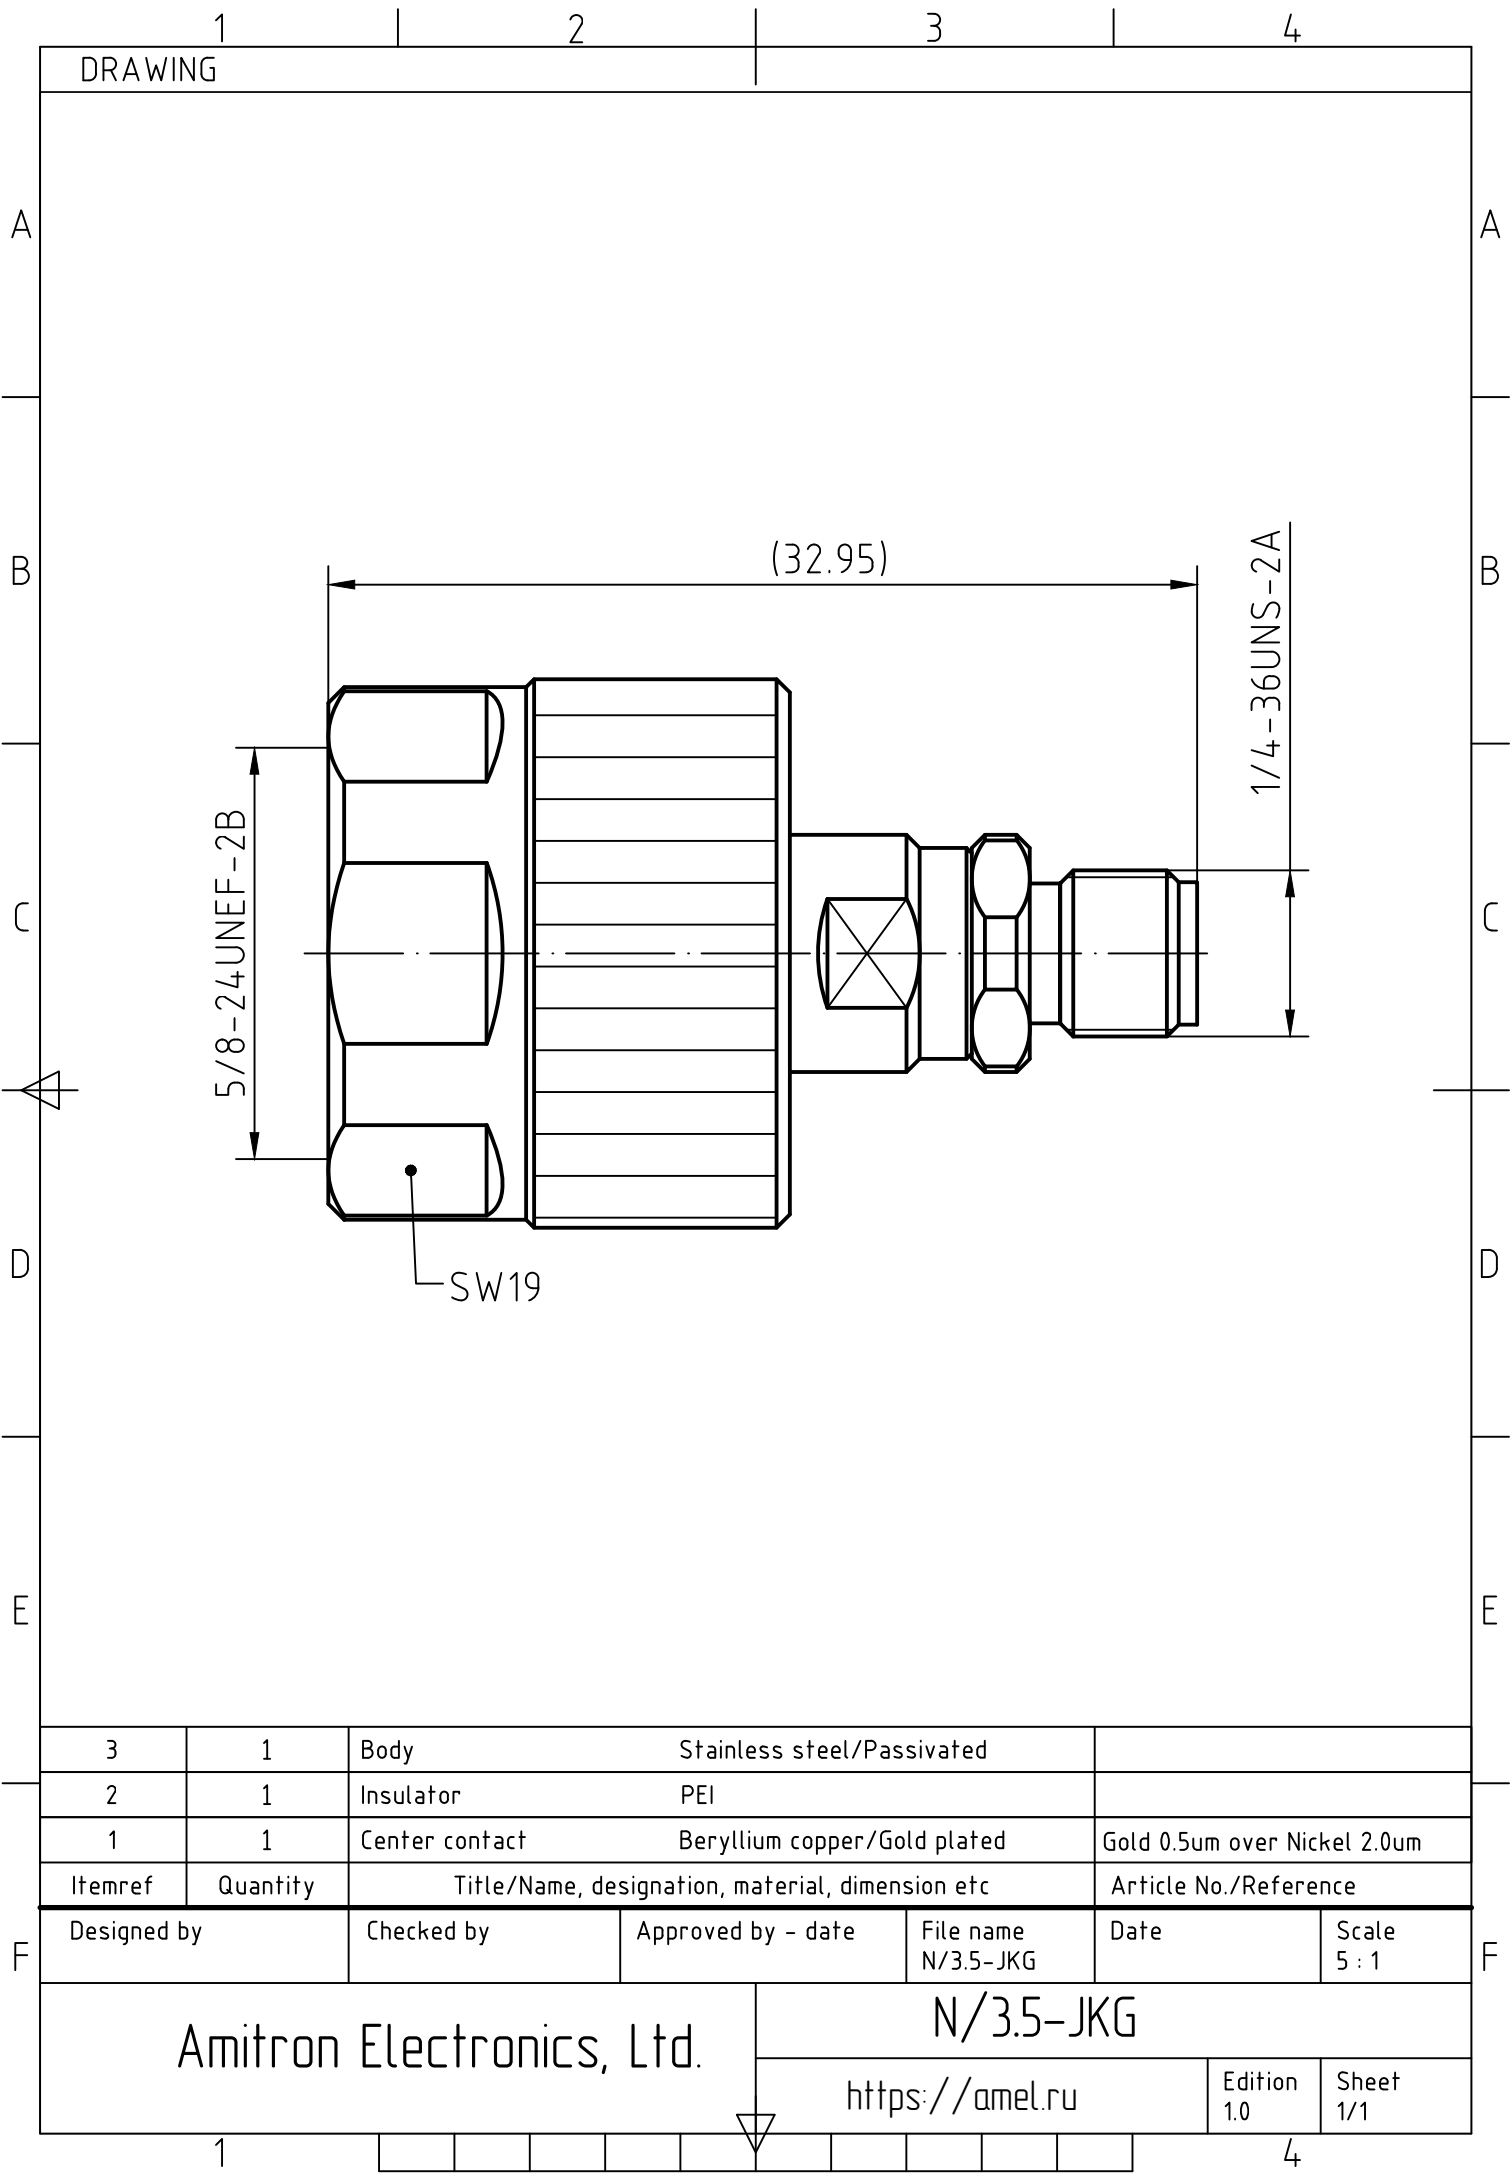

CHARACTERISTICS

DESCRIPTION:	ADAPTOR N PLUG TO 3.5 JACK
--------------	----------------------------

Electrical data:

Impedance:	50 Ω
Frequency range:	DC to 18.0 GHz
VSWR:	≤1.10:1
Insertion loss:	≤0.25dB
Insulation resistance:	≥5000MΩ
Test voltage:	750 V rms
Working voltage:	480 V rms
Contact resistance:	
1). Centre contact:	1.00 mΩ N side 3.0 mΩ SMA side
2). Outer conductor:	0.25 mΩ N side 2.0 mΩ SMA side

Environmental data:

Temperature rating:	-65 ° C to +165 ° C
2011/65/EU(ROHS 2.0):	Compliant

Mechanical data:

Mating cycles:	≥500
Center contact captivation:	≥15 N(axial)
Coupling test torque:	≤1.7 Nm
Recommended torque:	0.70 Nm to 1.1 Nm

Suitable cables:

N/A

Amitron Electronics, Ltd.	https://amel.ru
	e-mail: mailbox@amel.ru